

1

2

3


4

5






6

Total length (optional)

PLUG A
PIN.8
PIN.1

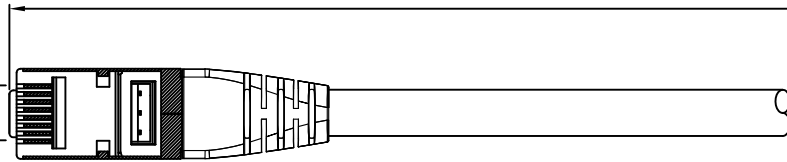

PLUG B
PIN.1
PIN.8

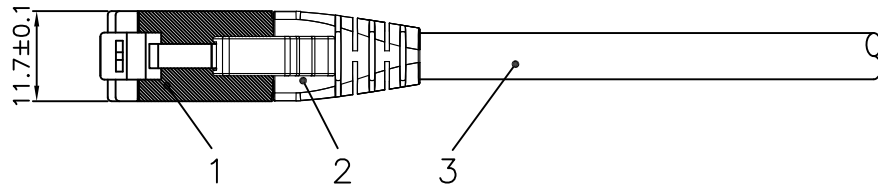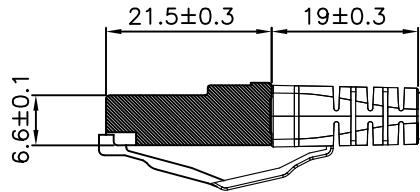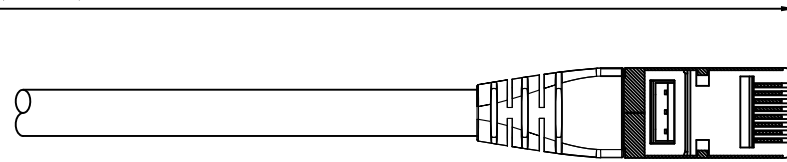

Specification :

Material :

1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
2. SR: SR for 26AWG with PC UL 94-V0 .
3. Cable :
 - 3-1. Jacket : PVC CM.
 - 3-2. Conductor : 26 AWG stranded copper.
 - 3-3. Isolation : PE.
 - 3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
 - 3-5. Cable structure : U/FTP, 4 twisted pair.

Performance :

- a. ISO CAT.6A Patch Cord

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	27.JAN.2016	HLL	
	CHECK	27.JAN.2016	YUAN	
	APPROVAL	27.JAN.2016	YTY	
	DATE		NAME	ITEM NO.:
SCALE	1/1 (A4)	UNIT	mm	DES.: C6A U/FTP 26AWG Patch Cord
		DRAWING NO.	CP C6A U-FTP 26AWG Patch Cord(SA1)	
DRAWING CLASSIFICATION		S	SHEET 1 OF 1	

1

2

0

3

4

10cm

5

6