






SCALE 1/1

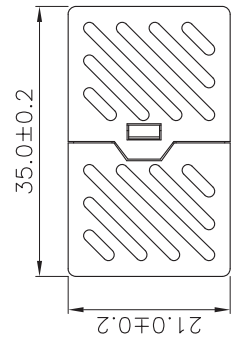

Specification :

- Material :
1. RJ45 Jack :
  - 1-1. Housing : ABS, UL 94V-0, with optional color.
  - 1-2. Contact Bracket : PC, UL 94V-2, transparent color.
  2. RJ45 Jack Contact :
  - 3-1. Material : Phosphor Bronze with Gold plated.
  - 3-2. Finish : 50 micro-inch Gold on Plug contact area.
  3. PCB : FR4, UL 94V-0.



- Performance :
- a. Insertion force : 20N max. (IEC 60603-7-4).
  - b. Retention strength : 7.7 kg between Jack and Plug.
  - c. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
  - d. Life(mating cycles) : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4)
  - e. The Cat.5e transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	17.JUN.2010	QIQI	GA TECH	
	CHECK	17.JUN.2010	JANE		
	APPROVAL	17.JUN.2010	JAIMY		
SCALE	1/1 (A4)	UNIT	mm	ITEM NO.:	CL-210A-C5E-XX
DRAWING NO.   AEBB01011311XX JE315A-CE-XX(SA5)	DRAWING CLASSIFICATION   S	DRAWING CLASSIFICATION   S	SHEET	1	OF 1